



公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>18	>30
~	~	~	~
3	6	50	80
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	±Z	±Z




(13.25)

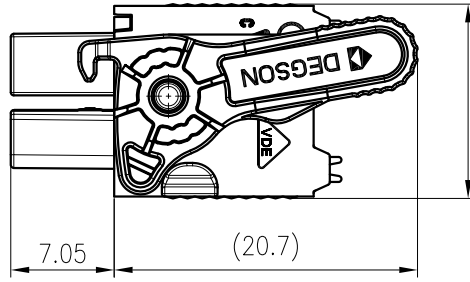

(3.1)

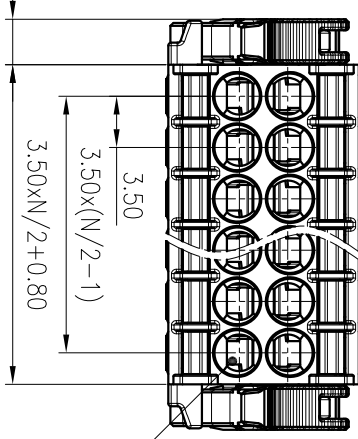

\*13.00

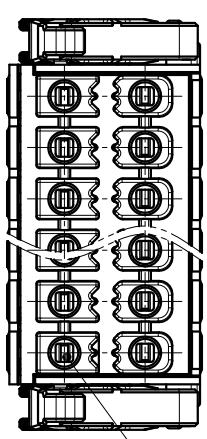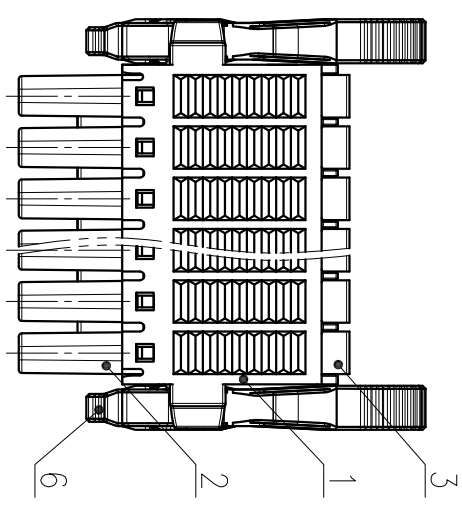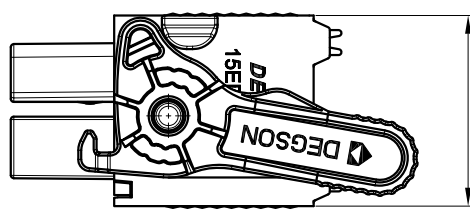

ITEM	NAME OF PART	MATERIAL	NOTES
6	Card hook	PA66-GF	UL94V-0
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:			
额定电压/Rated Voltage(V)	Current(A)	B	C
300/8	50/8		D
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/ Pollution Degree			
III/3	III/2	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)			
200/9.5	250/9.5	320/9.5	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			
2.5	2.5	2.5	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )			
26~16/0.2~1.5			
间距/Pitch(mm)/线数范围/Poles			
3.50/N=04~48P			
剥线长度/Stripping length(mm)			
10			
使用温度范围/Operating temperature(°C)			
-40~+105			
符合RoHS环保要求/Conform to RoHS			
SURFACE: Yes			

MATERIAL: NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

APPD: Lon CHH 2021.11.03

CHKD: /

DRAFT: Yu JZh 2021.11.03

NAME: 15EDGKNHG-3.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGKNHG-3.5-C01

REV	ECN	DESCRIPTION	DRAFT	DATE